



GP Manual Monitor STYLE 3430

The GP Manual Monitor is one of the most cost effective, highest performing firefighting monitors found worldwide. This monitor's rugged, lightweight design was engineered using some of the world's most advanced computer aided design and testing technology, resulting in performance seen by no other 1000 gpm (3800 lpm) monitor today. Once you grab the dual handled controls, you will know you are using the most highly maneuverable, easiest operating, most versatile fire service monitor in the world. No other monitor in its class even comes close!



Style 3430
with 487 GP Smooth Bore Tip



- Rated Flow up to 1000 gpm (3800 lpm)
- Rotation Continuous 360°
- Elevation +90° to -45°
- Cast-in turning vanes & integrated stream shaper for maximum reach and stream performance
- Built in pressure gauge
- "T" handle manual control provides precise, easy positioning and control
- Compact, efficient design requires minimum mounting space

Nozzle Options:

- Style 487 GP Smooth Bore Tip 1 1/4", 1 3/8", 1 1/2"
- Style 489 Smooth Bore Tip 1 3/4", 2"
- Style 4445 & Style 4447 Nozzles
- Style 5147 Adjustable Flow
- Style 5150 Automatic
- Style 1545 SaberMaster
- 2420 Triple Stacked Tips

Foam Options

- Style 4445 & Style 4447 Fog Nozzle with 3621 Foam Tubes
- Style 4475 Akrofoam
- Style 3625 Foam Tube
- Style 3626 Foam tube with Dispersion Jaws.

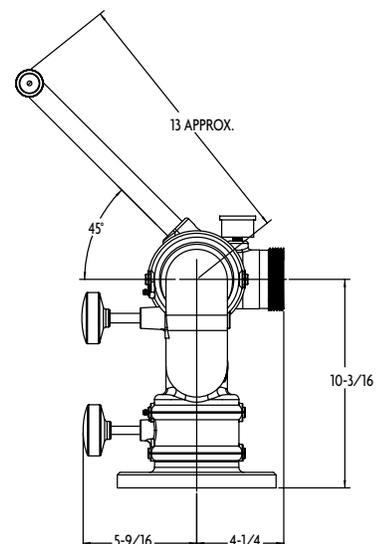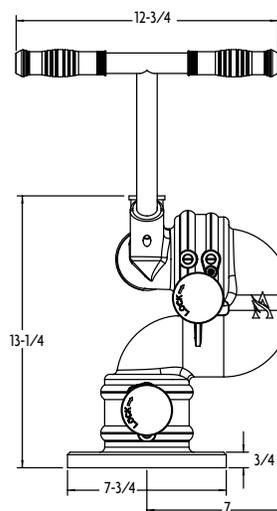

STYLE	WEIGHT LBS.	HEIGHT	WIDTH	INLET	OUTLET	FLOW	
						GPM	LPM
3430	15.4 lbs (7 kg)	13.25" (337mm)*	11" (279mm)	3" (75 mm) or DN80 FL	2.5" NH (65 mm)	1000	3800

* Less Tiller Bar



In U.S./International
Akron Brass Company
PH: 330.264.5678
FAX: 330.264.2944

In North America
Call Toll Free
PH: 1.800.228.1161
FAX: 1.800.531.7335

IN NORTH AMERICA CALL 1.800.228.1161 | FAX 1.800.531.7335

© Copyright 2010 Akron Brass Company. All rights reserved. No portion of this can be reproduced without the express written consent of the Akron Brass Company. (09/10)