
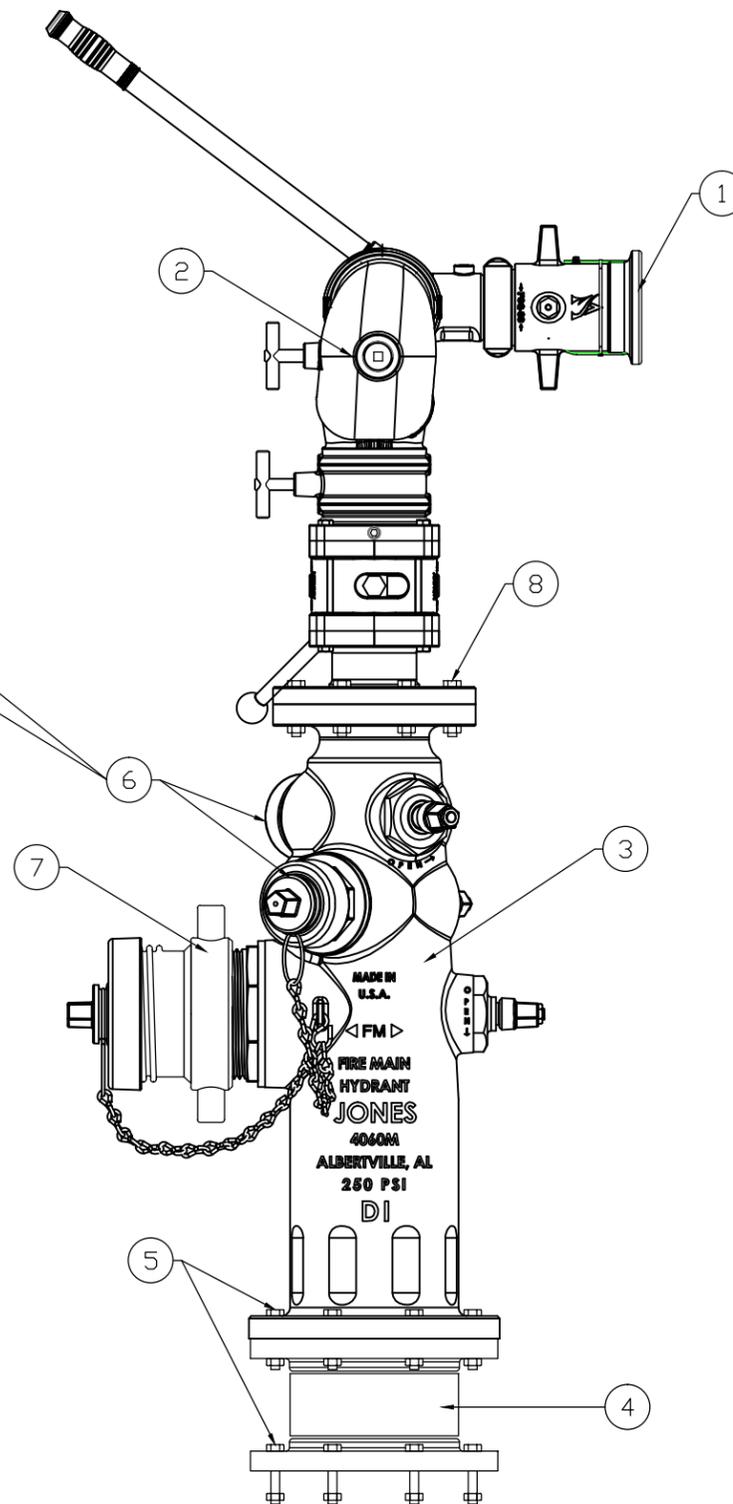


Technical Specification	
Description	Specification
Finishing	Red (As per manufacturer's colour code)

Part List					
Item	Description	Part No.	Material	Manufacturer	Qty
1	Aquastream Master Stream with Teeth, Style 4450, 300 GPM (1140 LPM)	445000034	Brass	Akron	1
2	Omega XPV 3523 Monitor, Max Flow 1250 GPM (4800 LPM)	3523	Brass	Akron	1
3	3-Way Monitor Fire Hydrant, 350 GPM (US) (1140 LPM)	J4060M-BR	Ductile Iron	Jones	1
4	Transition Flange 6" ANSI #150 FF to RF	3018750018001	Cast Iron	-	1
5	6" Bolt Kit	NSTK	-	-	1
6	2 1/2" Adaptor (65mm F.I. ST x 2.5" F.BSP)	25.45	Gunmetal	Walter Frank	2
7	4" Adaptor (Male R.T. x Female N.S.T.) c/w LA Cap	LM25TF	Aluminium Alloy	Walter Frank	1
8	4" Bolt Kit	NSTK	-	-	1

Tag List
FWHM-01
FWHM-02
FWHM-03
FWHM-04
FWHM-05
FWHM-06

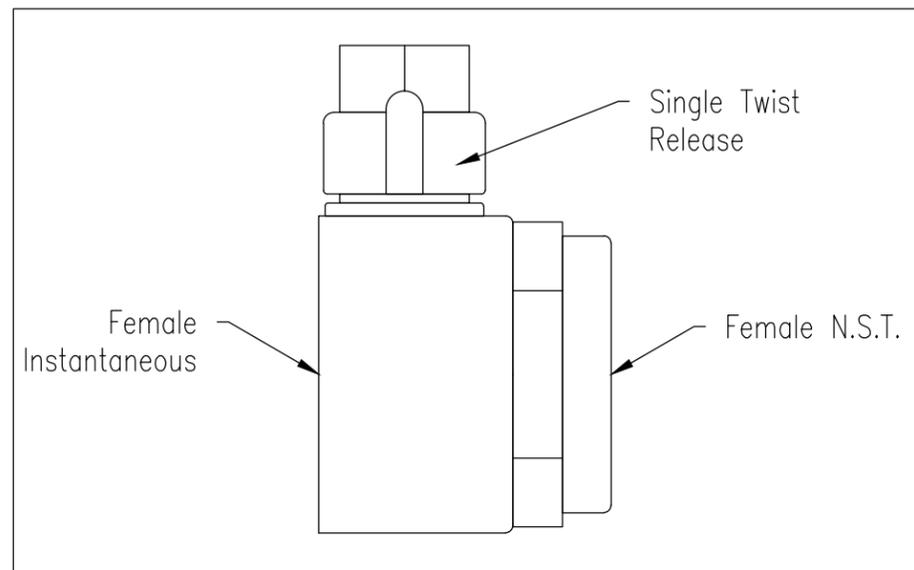

NOTES:

1.

COPYRIGHT © BY IRP FIRE AND SAFETY
ALL RIGHTS RESERVED

THIS DOCUMENT CONTAINS INFORMATION WHICH IS SUBJECT TO OBLIGATION OF CONFIDENTIALITY AND IS TO BE RETURNED UPON REQUEST. ITS CONTENTS MAY NOT BE COPIED, DISCLOSED TO THIRD PARTIES, OR USED FOR OTHER THAN THE EXPRESS PURPOSE FOR WHICH IT HAS BEEN PROVIDED WITHOUT THE WRITTEN CONSENT OF IRP FIRE & SAFETY LTD.

REFERENCE DRAWINGS:
1.

CLIENT NAME:	-
PROJECT NAME:	-
REF. NO.:	-
QUOTE REF. NO.:	-



DRAWING NAME:
FIRE HYDRANT WITH FIREWATER MONITOR

DRAWING NO.:

SCALE: NTS

SHEET NO.: 1 OF 1

REV.	DATE	DESCRIPTION	D'GN.	DWG'N.	CHK.	APPR.
0	06/08/2019	ISSUED FOR APPROVAL	CS	TS	CS	GT