


# 6' DOUBLE LEG EXTERNAL SHOCK PACK ABSORBING LANYARDS



C5002

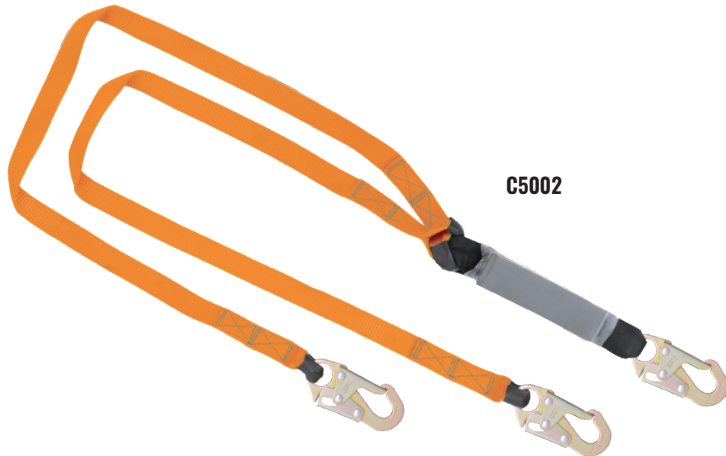

C5013

The 6' Double Leg External Shock Pack Absorbing Lanyards meet all the stringent ANSI® Z359.13-2013 regulations and are 100% ISO 17025 third party tested (per the ANSI® testing protocols). The integrated external shock absorbing pack component limits average arresting forces to 900 lbs. or less. Comprised of 1" polyester webbing, these lanyards are available with either locking snap hook or rebar hook anchor connection options. The 6' Double Leg External Shock Absorbing Lanyard is designed to be the "best in class"- functional, durable, and affordable.

Part #	Part Name	Weight
C5002	6' Double Leg External Shock Pack Absorbing Lanyard with 3 Steel Snap Hooks	3.7 lbs.
C5013	6' Double Leg External Shock Pack Absorbing Lanyard with 2 Rebar Hooks and 1 Steel Snap Hook	5.6 lbs.

## Key Features

- 1" Polyester Webbing
- Clear Shock Pack for Easy Inspection
- 3,600 lb. Connector Gate
- Meets ANSI Z359.13-2013, ANSI A10.32-12, OSHA 1926 Subpart M and OSHA 1910
- Worker Capacity Range: 130-310 lbs.
- Webbing Material: Polyester

