



Technical Specification Specification Description approx. 18.5kg Total Weight Hydrostatic Test Pressure 260 psi @5min Approved to EN671-1 : 2012 Design Approved to EN694 : 2014
EG - Red Polyester Powder Coated Fire Hose Drum Plates 170 psi (5-55 deg C) Jet : 15 gpm @ 80 psi Design Pressure Flowrate For Jet Spray Nozzle Approval LPCB,MED-Wheel Mark

Carton Box : L570xW315xH530 (03051700)

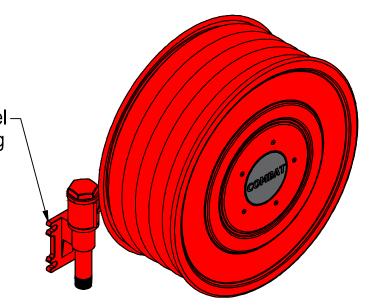



Mounting Position

TECHNICAL REQUIREMENTS:

- USE CLAMP BETWEEN THE PVC HOSE AND SWING BRACKET, ANOTHER SIDE OF THE PVC HOSE ALSO USE FERRULE AFTER CONTACT WITH THE NOZZLE.
- WATER PRESSURE TEST IS T.P.18BAR, KEEP PRESSURE 1 MIN.

INSTALLATION INSTRUCTIONS:

- 1. HOSE REEL TO BE INSTALLED IN AN UPRIGHT POSITION
- AS SHOWN IN DIAGRAM BACK AND SIDE VIEWS.
 2. SYSTEM INLET PIPING MUST BE INSTALLED AS A BOTTOM CONNECTION TO THE HOSE REEL 1" MNPT
- 3. HOSE REEL SWING ARM MUST NOT BE DISASSEMBLED FROM SWING BRACKET FOR INSTALLATION.
- 4. HOSE REEL SHOULD BE INSTALLED FRONT FACING

DISCLAIMER

- WARRANTY WOULD NOT BE HONORED IF HOSE REEL IS DISASSEMBLED TO BE INSTALLED.
- 2. WARRANTY WOULD NOT BE HONORED IF THE HOSE REEL IS INSTALLED NOT IN KEEPING WITH THIS INSTALLATION INSTRUCTION.

NOTES:

COPYRIGHT ® BY IRP FIRE AND SAFETY

ALL RIGHTS RESERVED

THIS DOCUMENT CONTAINS INFORMATION WHICH IS SUBJECT TO OBLIGATION OF CONFIDENTIALITY AND IS TO BE RETURNED UPON REQUEST. ITS CONTENTS MAY NOT BE COPIED, DISCLOSED TO THIRD PARTIES, OR USED FOR OTHER THAN THE EXPRESS PROSE FOR WHICH IT HAS BEEN PROVIDED WITHOUT THE WRITTEN CONSENT OF IRP FIRE ACTION.

Closed Position

CUENT NAME:

PROJECT NAME:

P.O. NO.:

QUOTE REF. NO.:

Swing Out Position



DRAWING NAME: 1"X30M MANUAL SWING HOSE REEL (HR-1SW)		REV.	DATE DD/MM/YYYY	DESCRIPTION	D'GN.	DWG'N.	снк.	APPR.
LOCATION:		1	14/05/2014	ISSUED FOR APPROVAL	GT	TS	DH	GT
		2	14/01/2016	RE-ISSUED FOR APPROVAL	GT	TS	DH	GT
DRAWING NO.:		3	21/12/2016	RE-ISSUED FOR APPROVAL	GT	TS	DH	GT
FSE-PROJ-DLF-150-LAY-0001		4	08/02/2017	RE-ISSUED FOR APPROVAL	GT	TS	DH	GT
SCALE:	SHEET NO.:							
NTS	1 OF 1							